

AITHER


Thea Pendant

Installation Instructions

INSTALLATION MUST BE PERFORMED BY A QUALIFIED ELECTRICIAN
PLEASE USE THE FOLLOWING DIAGRAM AND STEPS FOR INSTALLATION

CONTENTS:

- (1) Thea Pendant Fixture
- (2) Thea Glass
- (1) Canopy
- (1) Mounting Plate w/Ground Wire
- (2) 8-32 PHPMS
- (4) 6-32 FHSMS
- (1) 6-32 x 3/8" Cup Point Set Screw
- (1) Drop Stem
- (1) 1/4 NPS Threaded Rod
- (1) LED Driver
- (1) 1/16" Hex Key
- (7) Blue Wire Nuts
- (2) White Cotton Gloves

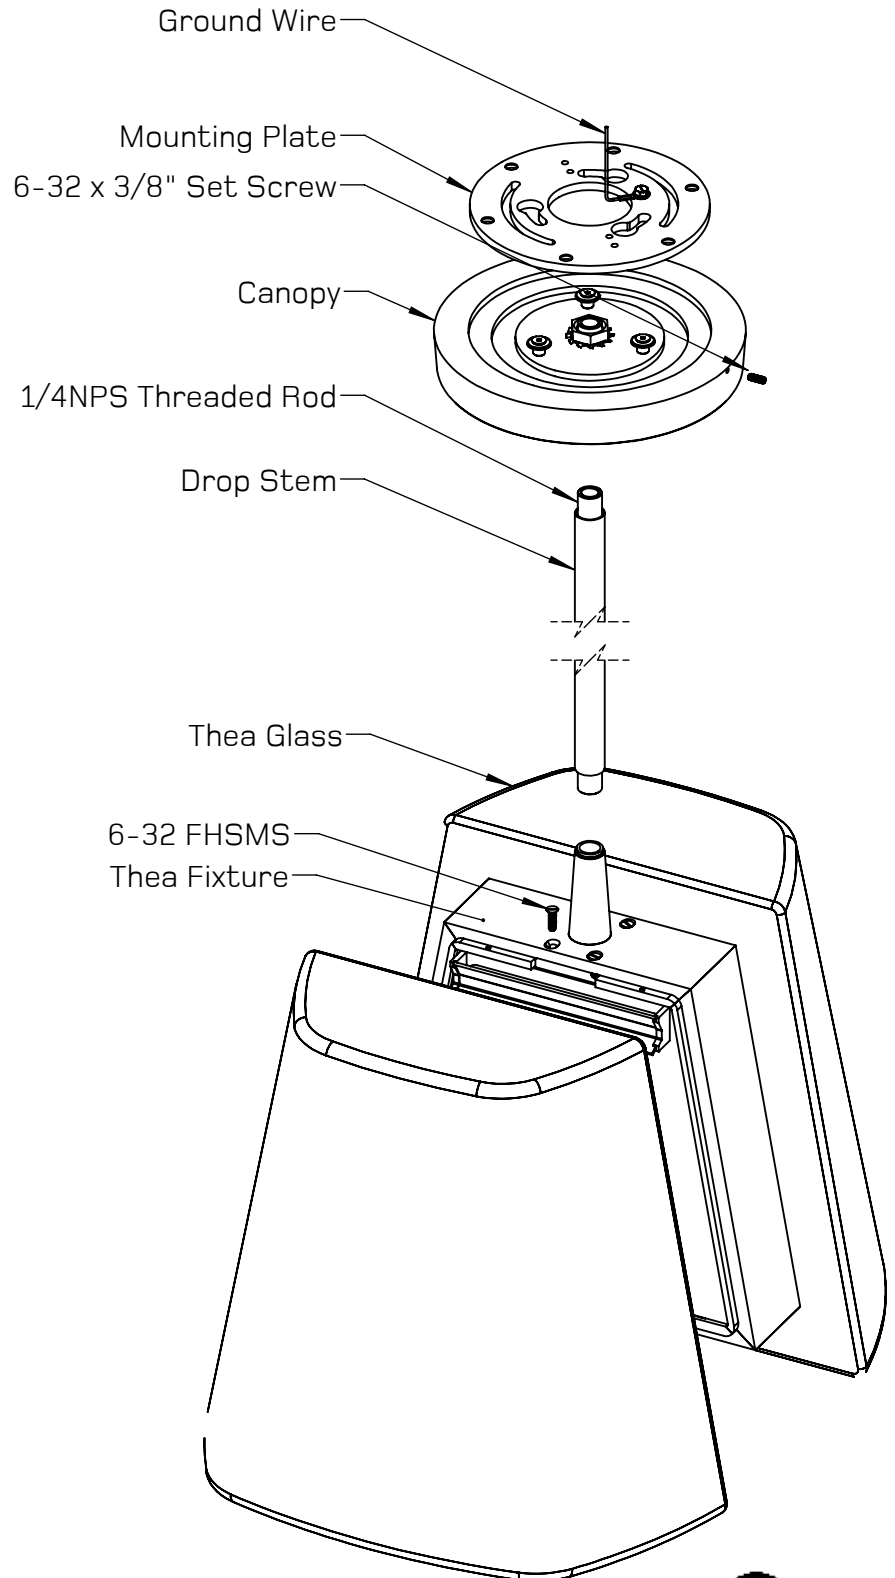

AITHER


Thea Pendant

Installation Instructions

INSTALLATION MUST BE PERFORMED BY A QUALIFIED ELECTRICIAN
PLEASE USE THE FOLLOWING DIAGRAM AND STEPS FOR INSTALLATION

INSTALLATION INSTRUCTIONS:

1. Make sure all power is shut off to the junction box where the fixture will be installed.
2. Make A/C electrical connections from driver to main power feed in junction box with wire nuts and tape. White wire to white wire, black wire to black wire. If using 0-10 volt dimming, connect purple wires to purple wires and gray wires to gray wires. If not using 0-10V dimming, cap wires from driver. Secure driver into junction box. See wiring diagram below.
3. Secure mounting plate to ceiling and junction box with appropriate hardware and/or anchors per installation requirements. Connect ground wire from mounting plate to junction box ground.
NOTE: Mounting requirements and hardware to be determined and provided by installer.
4. Run the wires from the fixture through the threaded rod assembly and drop stem. Screw threaded rod assembly into fixture.
5. Feed wires from drop stem into canopy and thread canopy to threaded rod assembly. DO NOT OVERTIGHTEN.
6. Raise and support fixture to ceiling and make low voltage electrical connections with blue wire nuts and tape. Red wires (+) to red wires (+), black wires (-) to black wires (-). See wiring diagram below.
7. Lift to mounting plate, align eyelets in canopy to key slots in mounting plate, and rotate clockwise $\approx 30^\circ$ into mounting plate. When fully seated, secure using the 6-32 set screw and provided 1/16" hex key.
8. Install Thea glass by aligning glass with one side of fixture. Push Glass flat against fixture. Secure tab at top of glass to fixture using the provided 6-32 FHSMS. Repeat for the other side.

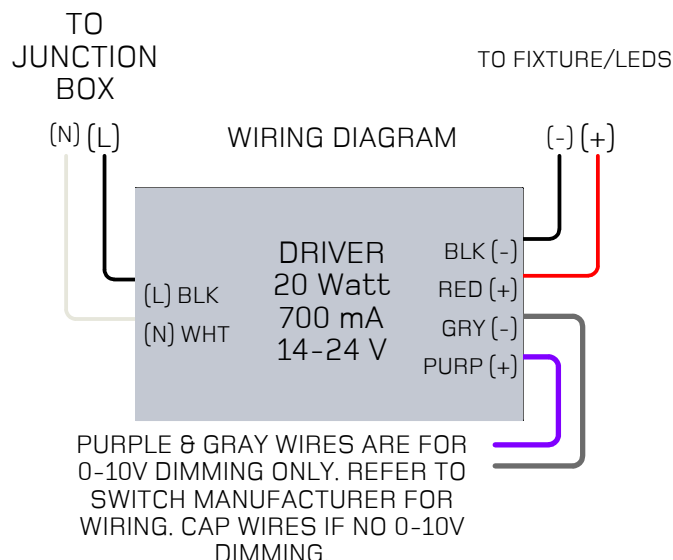

WEIGHT: 60 LBS.