


AITHER

Tholos 5 Pendant Chandelier

Installation Instructions

INSTALLATION MUST BE PERFORMED BY A QUALIFIED ELECTRICIAN
PLEASE USE THE FOLLOWING DIAGRAM AND STEPS FOR INSTALLATION

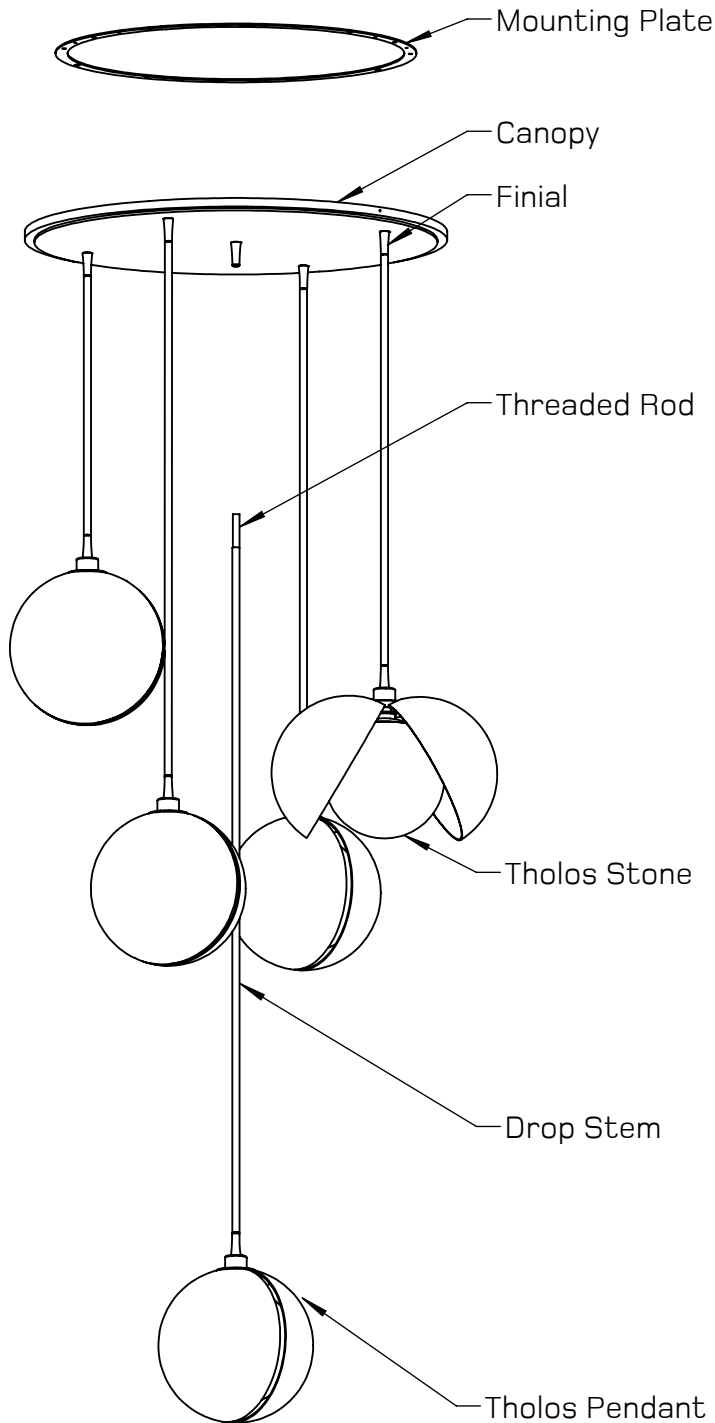


Contents:

- (1) Canopy
- (1) Mounting Plate with Ground Wire
- (5) Tholos Pendants
- (5) Tholos Stones
- (5) Drop Stem sets
- (5) Threaded rod sets
- (5) *Couplers if extended overall drop
- (5) Finials
- (10) 1/16 IPS Nuts
- (4) Sets temporary hooks and chains
- (2) Pair White Gloves
- (3) Blue Wire Nuts
- (1) .05 Hex key
- (9/64) Hex Key

CAUTION RISK OF FIRE:
MAX 25 WATT
TYPE T6 LAMP(S)

NOTE: DO NOT OVER TIGHTEN SCREWS
REV 9/4/2024

WEIGHT: 125 lbs

UL Approved in the US and Canada.  1/2

AITHER

Tholos 5 Pendant Chandelier

Installation Instructions


INSTALLATION MUST BE PERFORMED BY A QUALIFIED ELECTRICIAN
PLEASE USE THE FOLLOWING DIAGRAM AND STEPS FOR INSTALLATION

INSTALLATION INSTRUCTIONS:

1. Make sure all power is shut off to the junction box where the fixture will be installed.
2. Secure mounting plate to ceiling and junction box with appropriate hardware and/or anchors per installation requirements. Connect ground wire from mounting plate to junction box ground.
NOTE: Mounting requirements and hardware to be determined and provided by installer.
3. Run the wires from the pendants through the threaded rods and drop stem assemblies. Screw threaded rod assembly into Tholos Pendants. Note: Ensure Pendants are matched to labeled stems and threaded rods.
4. Raise and hang canopy to mounting plate with temporary hooks and chains. Make A/C electrical connections in junction box with blue wire nuts and tape. Neutral (white) Fixture wire to white A/C wire, Live (black) Fixture wire to black A/C wire. Note alignment/match point locations.
5. Feed wires from drop stems through finials and into canopy. Thread pendant threaded rods into finials until snug. DO NOT OVERTIGHTEN.
6. Make Pendant electrical connections to canopy wiring harness inside of canopy.
7. Support canopy with stems attached, remove temporary hooks and chains. Lift to mounting plate, align key holes in canopy to flat tabs in mounting plate, and rotate clockwise $\approx 30^\circ$ into mounting plate. When fully seated, secure using the 4-40 set screw in canopy and provided .05" hex key.
8. Install light bulb. Note: 25W max bulb.
9. Install Tholos Stone. Remove small blue tape securing spacer from Tholos Fixture (Above Light Bulb). Raise Tholos Stone over bulb and socket. Gently Spin Stone Clockwise threading the Stone onto the fixture. Spin Stone until it is Very Lightly seated. DO NOT OVERTIGHTEN.
10. Adjust metal shades to desired position. Note: shades are not designed to open more than 45 degrees. Note: Damage to shade may occur if shades are opened more than 45 degrees.

Notes:


1. Do not force metal shades.
2. Metal shades only designed to open 45 degrees.
3. Loosen metal shade clamp bolts if needed to adjust opening position of shade, retighten once in position. Use included 9/64 Hex Key.

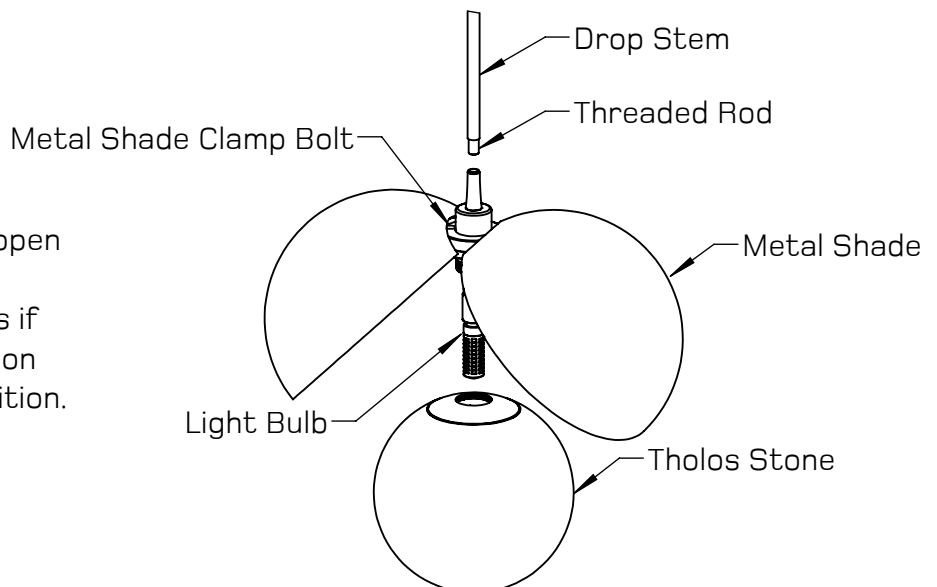

CAUTION RISK OF FIRE:
MAX 25 WATT
TYPE T6 LAMP(S)

NOTE: DO NOT OVER TIGHTEN SCREWS
REV 9/4/2024

WEIGHT: 125 lbs

UL Approved in the US and Canada.  2/2