


AITHER

Tholos Sconce Installation Instructions

INSTALLATION MUST BE PERFORMED BY A QUALIFIED ELECTRICIAN
PLEASE USE THE FOLLOWING DIAGRAM AND STEPS FOR INSTALLATION

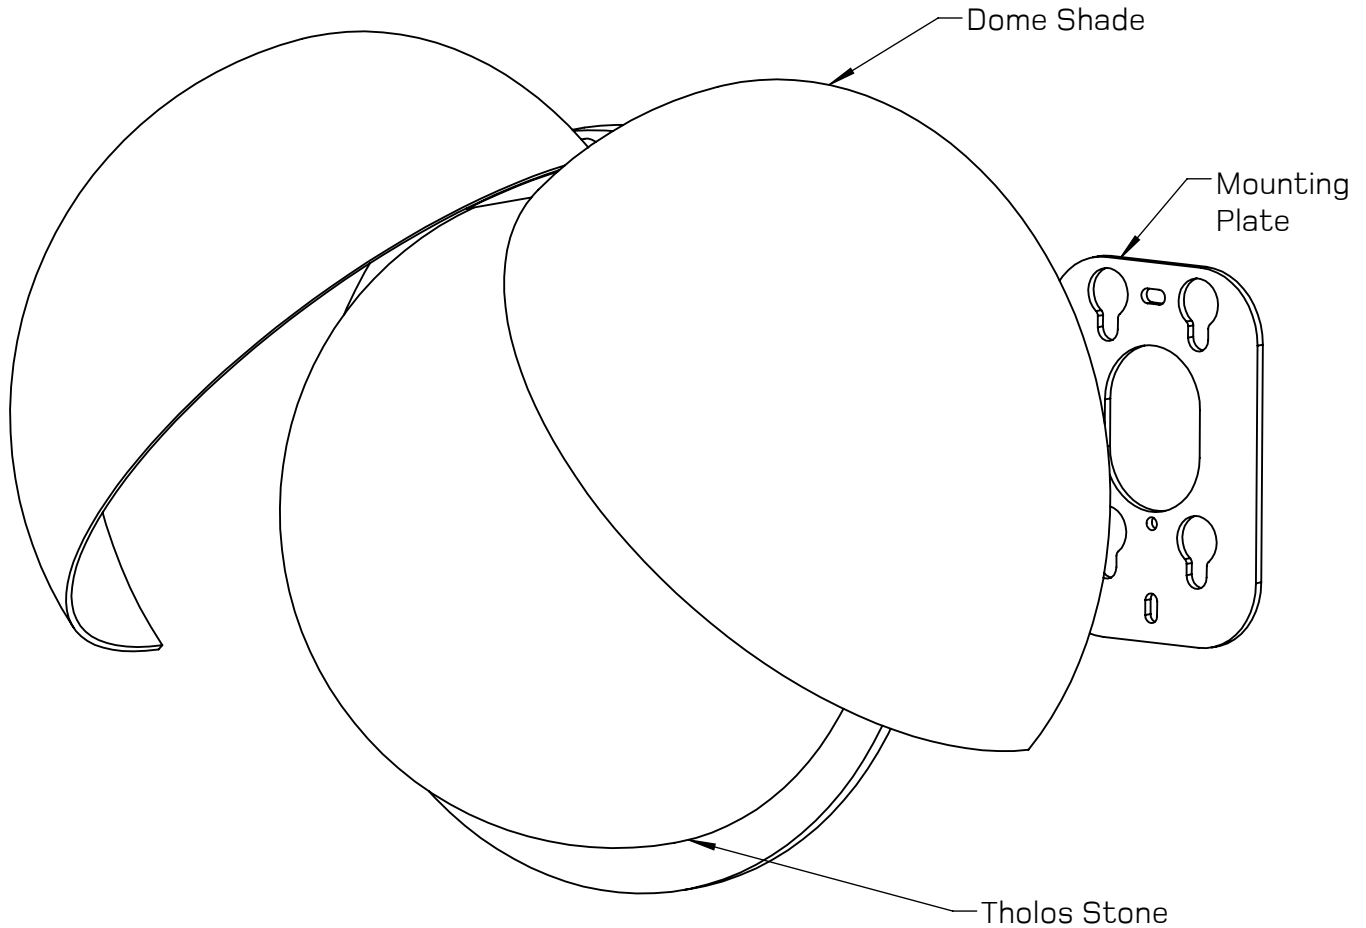

CONTENTS:

- (1) Tholos Sconce Fixture
- (1) Tholos Stone
- (1) Mounting Plate with
Pre-installed Ground Wire
- (1) LED Driver
- (1) 1/16 Hex Key
- (7) Blue Wire Nuts
- (2) 6-32 PHPMS



6-32 Mounting
Set Screw

AITHER


Tholos Sconce Installation Instructions

INSTALLATION MUST BE PERFORMED BY A QUALIFIED ELECTRICIAN
PLEASE USE THE FOLLOWING DIAGRAM AND STEPS FOR INSTALLATION

INSTALLATION INSTRUCTIONS:

1. Make sure all power is shut off to the j-box (Junction Box) where the fixture will be installed.
2. Make electrical connections from source power to input wires on the high voltage side of the LED Driver. Secure LED Driver in the j-box.
3. Remove outer protective packaging from sconce fixture.
NOTE: LEAVE ALL spacer material between metal dome and stone in place during installation.
4. Remove the mounting plate from the fixture by loosening the mounting set screw using the provided 1/16 hex key.
5. Install mounting plate to junction box with (2) 6-32 PHPMS. Make ground connections and pull the low voltage output wires from the LED Driver through the center hole in mounting plate.
NOTE: If not using 0-10V dimming, cap and secure 0-10V dimming wires in the j-box.
6. Raise fixture to mounting plate. Make electrical connections from the fixture wires to the output wires on the low voltage side of the LED Driver. Use leads labeled for low voltage use. Secure all excess wires in the j-box. **(See Wiring Diagram)**
NOTE: Red (+) to Red (+); Black (-) to Black/Blue (-)
NOTE: Support fixture by edge of backplate. DO NOT HOLD BY DOME SHADES OR STONE.
7. Secure fixture to mounting plate. Align and insert the stand-offs on the back side of the fixture to the key slots in the mounting plate. Gently slide down once inserted and secure by tightening the mounting set screw using the provided 1/16 Hex Key.
NOTE: Backside of mounting plate must be flush with wall surface for standoffs to properly align with mounting plate and for smooth operation. Adjust/shim mounting plate as needed for wall conditions.
NOTE: Support fixture by edge of backplate. DO NOT HOLD BY DOME SHADES OR STONE.
8. Remove all spacer material and adjust dome shades as desired. See Figure A-1.

WIRING DIAGRAM

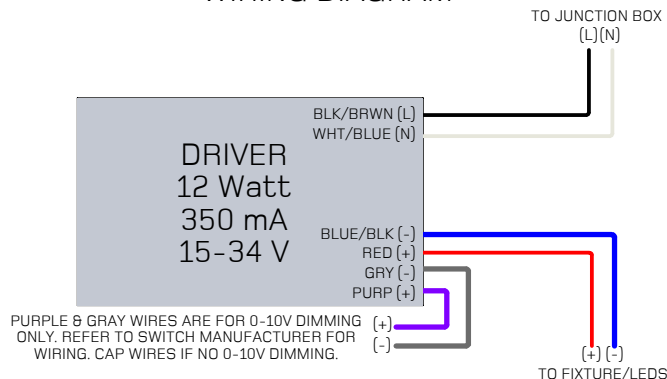


AITHER

Tholos Sconce

Installation Instructions

INSTALLATION MUST BE PERFORMED BY A QUALIFIED ELECTRICIAN
PLEASE USE THE FOLLOWING DIAGRAM AND STEPS FOR INSTALLATION

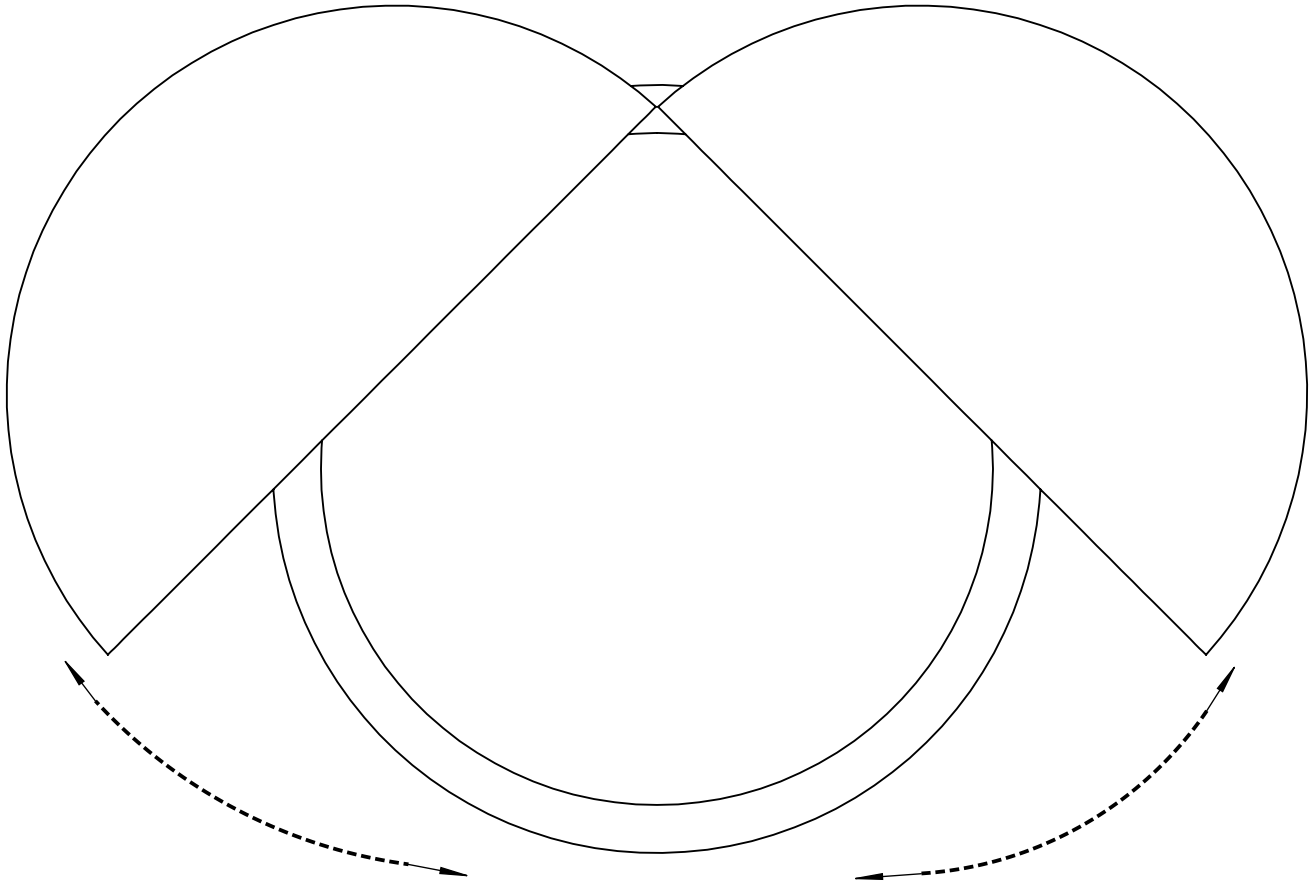

Adjusting Dome Shades:

1. Grab inside edge with thumb or finger and support shade.
2. Apply light pressure to rotate shade up/open. Shade will lock to 3 positions.
3. Repeat steps 1 & 2 to rotate shade down/closed.

NOTE: DO NOT press on outside of shade to close shade.

NOTE: DO NOT adjust shade up/open by bottom tip only.

NOTE: DO NOT USE EXCESSIVE FORCE.